查询XP6116供应商

XP6116

Silicon PNP epitaxial planer transistor

For switching/digital circuits

Features

- Two elements incorporated into one package.
  (Transistors with built-in resistor)
- Reduction of the mounting area and assembly cost by one half.

Basic Part Number of Element

- UN1116 × 2 elements

Unit: mm

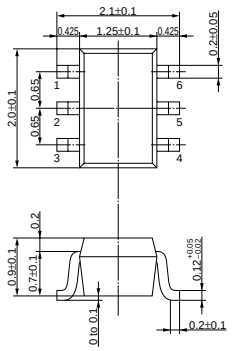

1 : Emitter (Tr1)
2 : Emitter (Tr2)
3 : Base (Tr2)
4 : Collector (Tr2)
5 : Base (Tr1)
6 : Collector (Tr1)
EIAJ : SC–88
S–Mini Type Package (6–pin)

Marking Symbol: 6Y

Internal Connection



Absolute Maximum Ratings (Ta=25˚C)

Parameter		Symbol	Ratings	Unit
Rating of element	Collector to base voltage	V_{CBO}	–50	V
	Collector to emitter voltage	V_{CEO}	–50	V
	Collector current	I_C	–100	mA
Overall	Total power dissipation	P_T	150	mW
	Junction temperature	T_j	150	˚C
	Storage temperature	T_{stg}	–55 to +150	˚C

Electrical Characteristics (Ta=25˚C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector to base voltage	V_{CBO}	I_C = –10µA, I_E = 0	–50			V
Collector to emitter voltage	V_{CEO}	I_C = –2mA, I_B = 0	–50			V
Collector cutoff current	I_{CBO}	V_{CB} = –50V, I_E = 0			– 0.1	µA
	I_{CEO}	V_{CE} = –50V, I_B = 0			– 0.5	µA
Emitter cutoff current	I_{EBO}	V_{EB} = –6V, I_C = 0			– 0.01	mA
Forward current transfer ratio	h_{FE}	V_{CE} = –10V, I_C = –5mA	160		460	
Forward current transfer h_{FE} ratio	h_{FE} (small/large)*1	V_{CE} = –10V, I_C = –5mA	0.5	0.99		
Collector to emitter saturation voltage	$V_{CE(sat)}$	I_C = –10mA, I_B = – 0.3mA			– 0.25	V
Output voltage high level	V_{OH}	V_{CC} = –5V, V_B = – 0.5V, R_L = 1kΩ	–4.9			V
Output voltage low level	V_{OL}	V_{CC} = –5V, V_B = –2.5V, R_L = 1kΩ			– 0.2	V
Transition frequency	f_T	V_{CB} = –10V, I_E = 1mA, f = 200MHz		80		MHz
Input resistance	R_1		–30%	4.7	+30%	kΩ

*1 Ratio between 2 elements

P_T — Ta

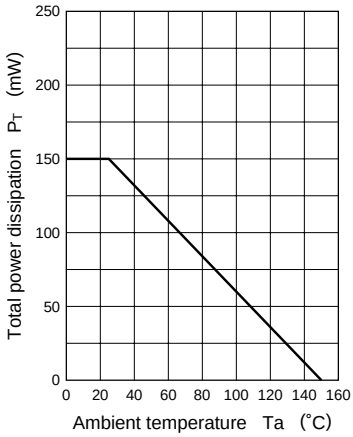

I_C — V_{CE}

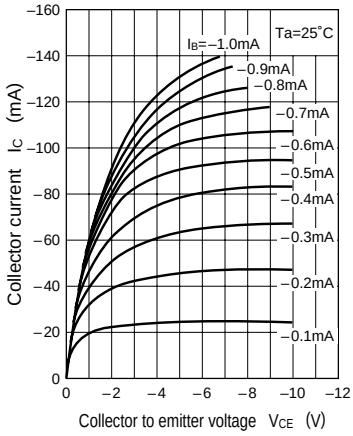

$V_{CE(sat)}$ — I_C

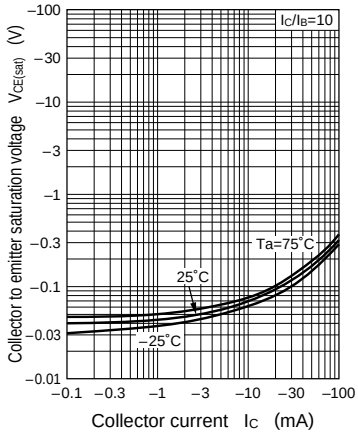

h_{FE} — I_C

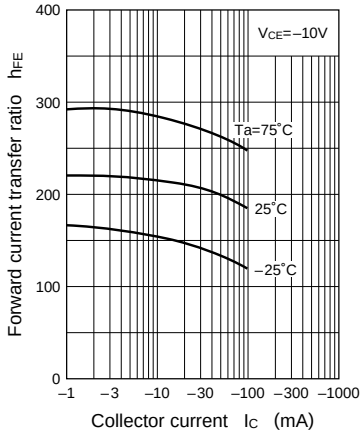

C_{ob} — V_{CB}

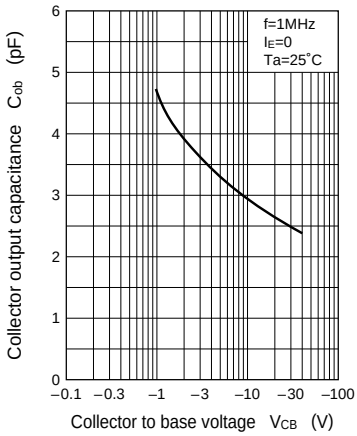

I_O — V_{IN}

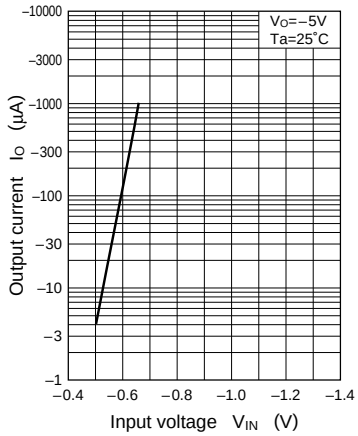

V_{IN} — I_O